

An Environmental Product Declaration (EPD) is an ISO Type III Environmental Declaration based on ISO 14025 standard. An EPD transparently reports the environmental performance of products or services from a lifecycle perspective. The preparation of an EPD includes different stages, from acquiring raw materials to the end of life of the final product/service. EPDs are based on international standards and consider the entire value chain. Additionally, EPD is a third-party verified document. This EPD includes several sections described below.

*HQHUDODQG3URJUDP,QIRUPDWLRQ

The first part of an EPD has information about the name of the manufacturer and product/service and other general information such as the validity and expiration dates of the document, the name of the program operator, geographical scope, etc. The second page states the standards followed and gives information about the program operator, third-party verifier, etc. The followed Product Category Rule (PCR) is indicated on the second page.

RPSDQDQG3URGXFW6HUULFH,QIRUPDWLRQ

Information about the company and the investigated product is given in this section. It summarizes the characteristics of the product provided by the manufacturer. It also includes information about the product such as product composition and packaging.

/,QIRUPDWLRQ

LCA information is one of the most important parts of the EPD as it describes the functional/declared unit, time representativeness of the study, database(s) and LCA software, along with system boundaries.

The table presented in this part has columns for each stage in the life cycle. The considered stages are marked 'X' whereas the ones that are not declared are labeled as 'ND'. Not all EPDs consider the full life cycle assessment for a product's entire life stages. The 'System Boundary' page is also the place where one can find detailed information about the stages and the assumptions made.

/5HVXOWV

The results of the Life Cycle Assessment analysis are presented in table format. The first column in each table indicates the name of the impact category and their measurement units are presented in the second column. These tables show an amount at each life cycle stage to see the impact of different indicators on different stages. Each impact can be understood as what is released through the production of the declared unit of the material—in this case, 1 kg machine plaster production. The benefits of reuse/recycling of the declared product is reflected in this section.

The first impact in the table is global warming potential (GWP), which shows how much CO₂ is released at each stage. Other impacts include eutrophication potential, acidification potential, ozone layer depletion, land use related impacts, etc. The second table provides results for resource use and the third table is about the waste produced during the production. The fourth and final table shows the results for the GWP-GHG indicator, which is almost equivalent to the GWP-Total indicator mentioned previously. The only difference is that this indicator excludes the biogenic carbon content by following a certain methodology.

The International EPD® System: EPD International AB Box 210 60 SE-100 31 Stockholm, Sweden, info@environdec.com

CEN standard EN 15804 serve as the core Product Category Rules (PCR), PCR 2019:14 Construction products, version 1.3.3., Construction EN 15804:2012+A2:2019/AC:2021 Sustainability of Construction Works

PCR review was conducted by: The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact.

Independent third-party verification of the declaration and data. according to ISO 14025:2006:

EPD process certification EPD verification ;

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via EPD is verified by individual verifier.

7KLUGSDUWYHULILHU Dr. Nasser Ayoub
SSURYHGE The International EPD ® System Technical Committee supported by the Secretariat

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes No ;

/LIHFOHVVHVPHQW/
/DFFRXQWDELOLW Orhan Atacan BSc, MBA - Metsims Sustainability Consulting

EPDs within the same product category but registered in different EPD programmes may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cutoff rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison.

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

2QHURIWKH(3 Onpo Madencilik Ins. San ve Tic. A.S.
3URGXFWLRQ3ODQW Ankara, Türkiye

Onpo Madencilik Ins. San ve Tic. A.S. has been established in year 2005. Since the day we were founded, we have worked to reveal the difference and reach the leading position in the Turkish plaster industry. Thus, we established the ONAT ALÇI brand in 2011. We continued to work in line with our future goals and principles in our factory, which contributes to the construction sector at the 20th km of Ankara Bala road.

While developing our durable, reliable and quality products, we have adopted the basic principle of contributing to a strong state and a strong economy. For this reason, in 2015, we expanded our influence by adding ONATPAN Gypsum Board factory to our company with 100% domestic capital, which is affiliated with Ali Rıza Onat Müt. Ins. ve Proj. Hizm. Tic ve San A.S. Thus, with its strong product range and production capacity, we continue to show our difference in the construction sector by producing 450 000 tons of Powder Gypsum and 15 000 000 m² of Gypsum Board per year in an area of 100 000 m².

Today, we continue to work with precision to ensure customer satisfaction and service quality, as well as our product quality, capacity and diversity. We talk to our customers, listen to them and constantly work to find solutions to their problems. We act with an innovative perspective in order to adapt our work to today's conditions, and we constantly follow technological developments. In line with these principles, we continue to provide multi-faceted benefits to Turkey's construction industry.

The company have Quality Management System - ISO 9001, Occupational Health and Management System - ISO 45001 and Environmental Management System - ISO 14001.



3URGXFV*URXS1DPH Machine Plaster

This EPD covers the product group. The EPD is based on the worst-case approach according to environmental impacts. The criterion for defining the worst-case product is mainly based on the declared environmental performance indicator.

,QFOXGHGSURGXFVOP11, Makonat Pro and OP77.

3URGXFV*URXSHVFULSWLRQ

Machine Plaster is applied on bricks, concretes, gas concretes, pumice blocks etc. It is a bagged gypsum-based concentrated ready to use plaster that can be applied directly on the materials by machine. It is A1 class fireproof material that provides sound insulation.

6XUIDFHDQG(QYLURQPHQWXULQJWKHSSOLFDWLRQ

It should be free from dirty materials such as dust, oil, paint. Extremely dry, hot and highly absorbent surfaces should be moistened with water. The surface of the ceilings should be roughened before applying the plaster or primed with a material that allows the mortar to stick to the surface. There should not be air flow or circulation in the environment during the application. The application temperature should be between +5 and +40 °C.


SSOLFDWLRQ

It is prepared in the plaster machine with the enough proportion of plaster/water (6,5-7,0 lt water / 10 kg Machine Plaster). The mortar is sprayed on the surface by machine. The application thickness is determined with the help of slabs according to the smoothness of the surface. Correction is made with a trowel. When the surface reaches a consistency that will not collapse when lightly pressed with a finger, trifling is performed. After the trifling process, the surface will be ready for painting by polishing again with a steel trowel.

The product UN CPC code is 37410 according to Central Product Classification (CPC) Version 2.1.

7HFKQLFDO6SHFLILFDWLRQVFFRUGLQJWR76(1

Physical Form	White powder
Plaster/Water Ratio	10 kg for 6,5- 7,0 lt water
Usage Period	90-120 minutes
Freezing Time	180-220 minutes
Dry Unit Weight	650-750 kg/m ³
Consumption Amount	7,0-7,5 kg/m ² (For every 1 cm thickness)
Fire Reaction Class	A1
Compressive Strength	≥ 2,0 N/mm ²
Flexural Strength	≥ 1,0 N/mm ²

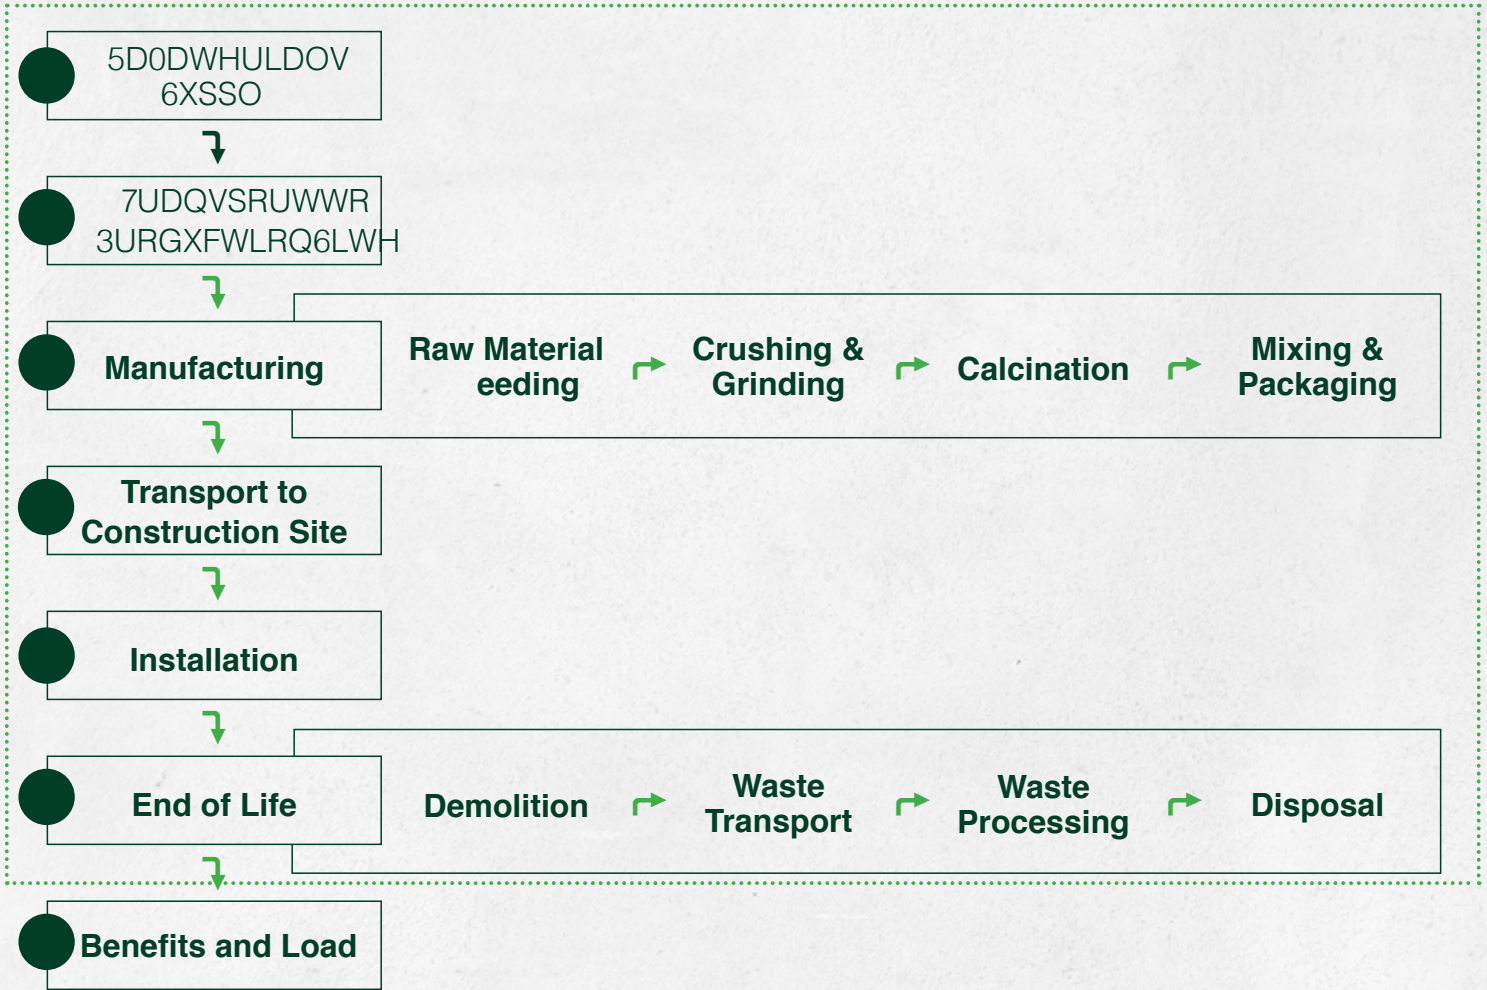

..... System Boundary

5D0DWHULDO6XSSO

Production starts with raw materials mainly locally sourced, but some transported from other parts of the world. ‘Raw material supply’ includes raw material extraction and pre-treatment processes before production. The stage covers the supply (quarrying) and production of all binder components and additives. The use of electricity, fuel and auxiliary materials in production is also taken into account.

5D0DWHULDO7UDQVSRUW

Raw material transport from supplier to manufacturer is considered in raw material supply stage. The distances and routes are calculated accordingly. Depending the manufacturer, locally supplied steel is transported via trucks and other supplies come through seaway.

7UDQVSRUW0RGH	7SH
Road	Vehicle: Lorry Size Class: >32 metric ton Emission Standard: EURO5 Fuel Type: Diesel
Sea	Vehicle: Container Ship DWT (Load Capacity): 43000 tonnes Fuel Type: Heavy Fuel Oil

0DQXIDFWXULQJ

Gypsum, quarried from the mine, undergoes initial crushing. Subsequent to this, it's heated in kilns, a process known as calcination, after which it is stored in silos designated for gypsum hemi-hydrate. Following this, gypsum hemi-hydrate, along with fillers and other additives, are conveyed to a mixer. The proportions of these materials are meticulously measured based on the specific characteristics of the product intended to be produced. Once the mixture reaches a uniform consistency, it is then moved on to the packaging area.

The end products are then packaged or sold as bulk. Electric and natural gas are consumed during the manufacturing.

,QIRUPDWLRQ	HVFULSWLRQ
Electricity Data	Türkiye electricity grid mix from Ecoinvent, Medium Voltage
Type of dataset	Cradle to gate
GWP of Electricity Data	0,578 kg CO ₂ eq./kWh

3URGXFW7UDQVSRUW

Product transport from manufacturer to customer is considered in product material supply stage. The distances and routes are calculated accordingly. Depending the customer location, product is transported via trucks and other supplies come through seaway.

7UDQVSRUW0RGH	7SH
Road	Vehicle: Lorry Size Class: >32 metric ton Emission Standard: EURO5 Fuel Type: Diesel
Sea	Vehicle: Container Ship DWT (Load Capacity): 43000 tonnes Fuel Type: Heavy Fuel Oil

,QVWDOODWLRQ

During the installation, water is used as a material. Since the materials used depend on the surface area, similar amounts of materials are used for all products. Additionally, electricity is needed for mixing by machine.

,QSXW	9DOXH
Water	0,4 liter/kg (Average requirements of all products)
Electric (Mixer)	0,034 kwh for 2 minutes

Additionally, LCA also includes the end-of-life of packaging waste at the installation site. End-of-life scenarios of packaging materials are modelled by assuming EU statistics.

HFRQVWUXFWLRQHPPROLWLRQ

There is no energy use during uninstillation, manpower and some tools are sufficient.

:DVWH7UDQVSRUW

Waste transport includes the transport of materials after they reach their end-of-life. The average distance was assumed 50 km by truck from demolition site to a waste or recycling area.

3DUDPHWHU	9DOXH
Vehicle Type	Vehicle: Lorry Size Class: 16-32 metric ton Emission Standard: EURO4 Fuel Type: Diesel
Distance	50 km

:DVWH3URFHVVLQJ

The product is considered to be landfilled without reuse, recovery or recycling. It is classified as 'nonhazardous waste' in the European list of waste products. The impacts of any treatment process to the demolished waste is included in this stage. It is assumed that no treatment is needed as 100 % of the material goes to a landfill.

LVSrvDO

All plasters end up at construction and demolition waste landfills as their final fate and modelled as such in the LCA.

%HQHILWV

No potential benefits of recycling and re-use were taken into account. Only the benefit due to the recycling of the packaging has been calculated.

HFODUHG8QLW1 kg of machine plaster

7LPH5HSUHVHQWDWLYHQ2023 (12 months)

DWDEDVHVDQG/6RIWDUHEcoinvent 3.9.1 and SimaPro 9.5

6VWHP%RXQGDULHV Cradle to gate with options, modules C1–C4, module D and with optional modules (A4-A5).

	3URGXFW6WDJH			RQVWUXFWLRQ 3URFHVV6WDJH		8VH6WDJH							(QGRI/LIH6WDJH				%HQHILW DQG /RDGV
	5D0DWHULD06XSSO	7UDQVSRUW	0DQXIDFWXULQJ	7UDQVSRUWUURPWWKHJD WRWKHLVWH	VHPEO	8VH	0DLQWHQDQFH	5HSDLU	5HSODFHPHQW	5HXUELVLKPHQW	2SHUDWLQDQD(QHUJ8VH	2SHUDWLQDQD:DWHU8VH	HFRQVWUXFWLRQ	7UDQVSRUW	:DWWH3URFHVVVLQJ	LVSVD0	5HXVH5HFFOLQJ 5HFRYHU3URWHQWLDQ
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
0RGXOHV HFODUHG	X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
*HRJUDSK	GLO		TR	GLO													
6SHFLILF DWD8VHG	3%																
9DULDWLRQ 3URGXFVV	34%																
9DULDWLRQ 6LWVH	0%																

(X:Included in LCA, ND: Not Declared)

*HRJUDSKLFD06FRSH

The geographical scope of this EPD is global.

OORFDWLRQ

According to 2023 production figures, total water consumption, energy consumption and raw material transportation are allocated by weighted average. In addition, total hazardous and non-hazardous waste amounts were allocated according to production tonnage. There is no co-product allocation.

%DFNJURXQGDWD

For all LCA modelling and calculation, Ecoinvent database (v3.9.1) and SimaPro (v9.5) LCA software were used. Characterization factors of EN 15804 reference package based on EF 3.1 are utilized. Impact of infrastructure and capital goods are excluded from the analysis.

VVXPSWLRQV

Upstream and downstream road transportation are assumed to be carried out with EURO5 motor vehicles with a size class of 16-32 metric tonnes where distances acquired through Google Maps. In addition, 50 km distance for the waste transport at C2 stage is assumed.

XW2IIULWHULD

1% cut-off is applied in LCA. Data for elementary flows to and from the product system contributing to a minimum of 99% of the declared environmental impacts have been included.

5HDFK5HJXODWLRQ

No substances included in the Candidate List of Substances of Very High Concern for authorization under the REACH regulations are present in this product either above the threshold for registration with the European Chemicals Agency or above 0.1% (wt/wt).

3URGXFWRPSRVLWLRQ

Gypsum is the main input of the process. Additives are included in the assessment.

3URGXFWRPSRQHQQW	:HLJKW	3RVWFRQVXPHUPDWHULDO HLJKW	%LRJHQLFPDWHULDO HLJKWDQGNJNJ
Gypsum	70-80	0	0
Calcite	15-25	0	0
Additives	0-5	0	0

3DFNDJLQJRPSRVLWLRQ

Plasters are packaged and send to customer. Pallets, and nylon films are generally used in packaging.

3URGXFWRPSRQHQQW	:HLJKWNJ	:HLJKW YHUVXVWKHSURGXFW	:HLJKWELRJHQLFFDUERQ NJNJ
Pallet	0,011	1,1%	0,59
Big Bag	0,001	0,1%	0
Nylon Film	0,00036	0,036%	0
Stretch Film	0,00036	0,036%	0

/ORGHOOLQJDOFXODWLRQQGDWD4XDOLW

The results of the LCA with the indicators as per EPD requirement are given in the LCA result tables. All energy calculations were obtained using Cumulative Energy Demand (LHV) methodology, while fresh water use is calculated with selected inventory flows in SimaPro according to the PCR. There are no co-product allocations within the LCA study underlying this EPD. The regional energy datasets were used for all energy calculations. Data quality assessment is given below table.

	?
Raw Material Supply	Generic database, plant specific data
Raw Material Transport	Generic database, plant specific data
Manufacturing	Generic database, plant specific data
Product Transport	Generic database, generic data
Installation	Generic database, generic data
End of Life	Generic database, generic data
Benefits and Loads	Generic database, generic data

It is discouraging the use of the results of modules A1-A3 (A1-A5 for services) without considering the results of module C. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

25((19,5210(17,03763(5/5(81,7

0DQGDWRULQGLFDWRUV										
		8QLW								
Global Warming Potential	Fossil	kg CO ₂ eq.	1,75E-01	8,11E-05	1,98E-02	5,78E-02	9,35E-03	0,00E+00	6,20E-03	-1,48E-03
	Biogenic	kg CO ₂ eq.	-2,82E-02	2,21E-08	1,84E-02	2,22E-04	2,99E-06	1,05E-02	2,61E-04	-3,76E-06
	Luluc	kg CO ₂ eq.	2,48E-04	4,60E-08	2,34E-04	6,87E-04	4,57E-06	0,00E+00	3,74E-06	-9,25E-06
	Total	kg CO ₂ eq.	1,47E-01	8,11E-05	3,84E-02	5,87E-02	9,36E-03	1,05E-02	6,46E-03	-1,50E-03
ODP		kg CFC-11 eq.	6,98E-09	1,26E-12	1,35E-10	3,88E-10	2,05E-10	0,00E+00	1,80E-10	-3,93E-11
AP		mol H+ eq.	9,02E-04	8,61E-07	1,41E-04	4,14E-04	3,87E-05	0,00E+00	4,67E-05	-8,60E-06
EP - Freshwater		kg P eq.	4,46E-05	5,55E-09	2,27E-05	6,64E-05	6,59E-07	0,00E+00	5,16E-07	-5,61E-07
EP - Marine		kg N eq.	2,04E-04	2,33E-07	2,37E-05	6,93E-05	1,48E-05	0,00E+00	1,79E-05	-2,66E-06
EP - Terrestrial		mol N eq.	2,23E-03	2,54E-06	2,13E-04	6,23E-04	1,58E-04	0,00E+00	1,92E-04	-2,91E-05
POCP		kg NMVOC	7,83E-04	7,88E-07	6,24E-05	1,82E-04	5,67E-05	0,00E+00	6,69E-05	-1,26E-05
**ADPE		kg Sb eq.	1,94E-06	1,81E-10	2,17E-08	6,20E-08	3,02E-08	0,00E+00	8,61E-09	-8,31E-09
**ADPF		MJ	2,34E+00	1,13E-03	2,08E-01	6,04E-01	1,33E-01	0,00E+00	1,54E-01	-2,56E-02
**WDP		m ³ depriv.	5,27E-02	5,01E-06	2,78E-02	3,23E-02	5,44E-04	0,00E+00	6,82E-03	-7,64E-04
Additional environmental impact indicators per declared unit (Optional)										
PM		disease inc.	9,86E-09	6,61E-12	6,47E-10	1,88E-09	7,66E-10	0,00E+00	1,02E-09	-1,51E-10
*IR		kBq U-235 eq.	7,40E-03	9,22E-07	2,09E-04	4,77E-04	1,79E-04	0,00E+00	9,78E-05	-1,67E-04
**HTP - C		CTUh	1,02E-10	3,50E-14	4,75E-12	1,24E-11	4,27E-12	0,00E+00	2,64E-12	-1,17E-11
***HTP - NC		CTUh	2,24E-09	7,07E-13	1,78E-10	5,04E-10	9,40E-11	0,00E+00	3,30E-11	-1,96E-11
**SQP		Pt	2,82E+00	8,95E-04	2,07E-02	5,95E-02	7,95E-02	0,00E+00	3,07E-01	-7,97E-01
Legend	A1: Raw Material Supply. A2: Transport. A3: Manufacturing. A1-A3: Sum of A1. A2. and A3. A4: Transport to Site. C1: De-Construction. C2: Waste Transport. C3: Waste Processing. C4: Disposal. D: Benefits and Loads Beyond the System Boundary.									
Acronyms	GWP-total: Climate change. GWP-fossil: Climate change- fossil. GWP-biogenic: Climate change - biogenic. GWP-luluc: Climate change – land use and transformation. ODP: Ozone layer depletion. AP: Acidification terrestrial and freshwater. EP-freshwater: Eutrophication freshwater. EPmarine: Eutrophication marine. EP-terrestrial: Eutrophication terrestrial. POCP: Photochemical oxidation. ADPE: Abiotic depletion - elements. ADPF: Abiotic depletion - fossil resources. WDP: Water scarcity. PM: Respiratory inorganics - particulate matter. IR: Ionising radiation. HTP-c: Cancer human health effects. HTP-nc: Non-cancer human health effects. SQP: Land use related impacts. soil quality									
*Disclaimer 1	This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents. occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil. from radon and from some construction materials is also not measured by this indicator.									
**Disclaimer 2	The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

,7,21/01725,0377(*25,1,7256									
3(5/5(81,7									
3DUDPHWHU	8QLW								
GWP - GHG	kg CO ₂ eq.	1,76E-01	8,13E-05	2,01E-02	5,88E-02	9,38E-03	0,00E+00	6,22E-03	-1,50E-03

GWP-GHG = Global Warming Potential total excl. biogenic carbon following IPCC AR5 methodology
 *The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013

5(6285(86(,1,7256									
3(5/5(81,7									
3DUDPHWHU	8QLW								
PERE	MJ	6,59E-01	1,29E-05	6,84E-02	2,00E-01	2,07E-03	0,00E+00	1,32E-03	-1,47E-01
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	6,59E-01	1,29E-05	6,84E-02	2,00E-01	2,07E-03	0,00E+00	1,32E-03	-1,47E-01
PENRE	MJ	2,34E+00	1,13E-03	2,08E-01	6,04E-01	1,33E-01	0,00E+00	1,54E-01	-2,56E-02
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	2,34E+00	1,13E-03	2,08E-01	6,04E-01	1,33E-01	0,00E+00	1,54E-01	-2,56E-02
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m3	1,25E-03	2,00E-07	5,51E-04	2,44E-04	2,16E-05	0,00E+00	1,64E-04	-9,29E-06

Legend PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM: Use of renewable primary energy resources used as raw materials; PERT: Total use of renewable primary energy resources; PENRE: Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM: Use of non-renewable primary energy resources used as raw materials; PENRT: Total use of non-renewable primary energy resources; SM: Use of secondary material; RSF: Use of renewable secondary fuels; NRSF: Use of non-renewable secondary fuels; FW: Use of net fresh water

:67(287387,1,7256									
3DUDPHWHU	8QLW								
HWD	kg	6,95E-05	2,77E-08	1,49E-05	4,33E-05	3,30E-06	0,00E+00	1,90E-06	-2,61E-06
NHWD	kg	2,73E-02	7,58E-05	1,22E-03	3,52E-03	6,52E-03	0,00E+00	1,02E+00	-4,81E-04
RWD	kg	1,85E-06	2,18E-10	5,02E-08	1,12E-07	4,34E-08	0,00E+00	2,28E-08	-4,34E-08
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	4,04E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EE (Electrical)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EE (Thermal)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Legend HWD: Hazardous waste disposed, NHWD: Non-hazardous waste disposed, RWD: Radioactive waste disposed, CRU: Components for reuse, MFR: Material for recycling, MER: Materials for energy recovery, EE (Electrical): Exported energy electrical, EE (Thermal): Exported energy, Thermal.

,QWHUSUHWDWLRQ2IOO/6WDJHV


When the environmental impact categories of the product are evaluated, the production stages (A1-A3) and installation stage (A5) seem more dominant than other life cycle stages. The most dominant phase in the GWP-luluc, EP-freshwater and water depletion potential categories is the production stage, while the installation stage is dominant in all other impact categories. The use of plaster (as an adhesive), steel profiles and steel screws during the installation stage is the reason for the prominent impacts here. The table below lists the share of life cycle stages in each impact category. Impact category of GWP-biogenic and D module are not included in the percentage display because they contain negative values.

3DUDPHWHU								
Global Warming Potential	Fossil	65,3%	0,0%	7,4%	21,5%	3,5%	0,0%	2,3%
	Biogenic							
	Luluc	21,1%	0,0%	19,9%	58,4%	0,4%	0,0%	0,3%
	Total	54,4%	0,0%	14,2%	21,7%	3,5%	3,9%	2,4%
ODP		88,5%	0,0%	1,7%	4,9%	2,6%	0,0%	2,3%
AP		58,4%	0,1%	9,2%	26,8%	2,5%	0,0%	3,0%
EP - Freshwater		33,1%	0,0%	16,8%	49,3%	0,5%	0,0%	0,4%
EP - Marine		61,8%	0,1%	7,2%	21,0%	4,5%	0,0%	5,4%
EP - Terrestrial		65,2%	0,1%	6,2%	18,2%	4,6%	0,0%	5,6%
POCP		68,0%	0,1%	5,4%	15,8%	4,9%	0,0%	5,8%
ADPE		94,0%	0,0%	1,1%	3,0%	1,5%	0,0%	0,4%
ADPF		68,0%	0,0%	6,0%	17,6%	3,9%	0,0%	4,5%
WDP		43,8%	0,0%	23,2%	26,9%	0,5%	0,0%	5,7%

(QYLURQPHQWDO,PSDFVLVWULEXWLRQE/6WDJHV

,PSDFWDWHJRULHV

The chart below examines the GWP comparison between life cycle stages. The graph shows that the installation stage (A5) has the highest GWP value. The production stage, following this stage, has the second highest GWP. Due to the product's dry weight, the shipment phase to the customer (A4) has a high GWP value compared to the other phases and is the third-highest module.

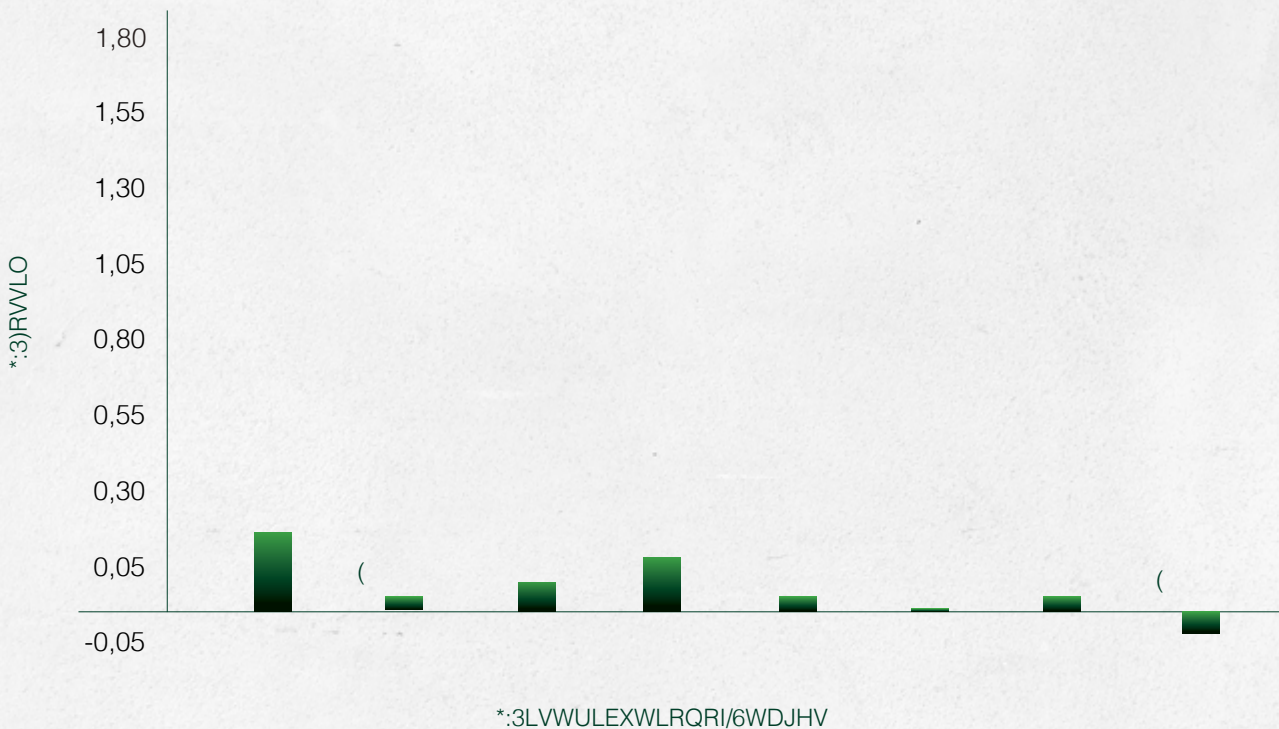

3URGXFWLRQ6WDJHV

The production stage includes 3 stages: raw material extraction (A1), transportation of the raw material to the factory site (A2) and manufacturing (A3). The GWP-total impact has a lower value than the GWP-fossil due to the negative biogenic carbon impact from kraft paper and cellulose. The negative bionic impact value should be taken into account when interpreting the GWP-total value.

*3, General Programme Instructions of the International EPD® System. Version 4.0. EN ISO 9001/ Quality Management Systems - Requirements EN ISO 14001/ Environmental Management Systems - Requirements

(1 Sustainability of construction works - Environmental Product Declarations
- Core rules for the product category of construction products

,62 ,1 (1 ,62 Environmental labels and declarations - Type III
environmental declarations - Principles and procedures

35 IRU RQVWUXFWLRQ 3URGXFWV DQG RQVWUXFWLRQ 6HUYLFH Prepared by IVL Swedish Environmental Research Institute, Swedish environmental Protection Agency, SP Trä, Swedish Wood Preservation Institute, Swedisol, SCDA, Svenskt Limträ AB, SSAB, The International EPD System, 2019:14 Version 1.3.3

,62,1(1,62 / Environmental management - Life cycle assessment
- Principles and framework (ISO14040:2006) and Requirements and guidelines (ISO 14044:2006

,62 Quality Management System

,62 Occupational Health and Management System

,62 Environmental Management System

7KH,QWHUQDWLRQDOEPD® The International EPD ® System is a programme for type III environmental declarations, maintaining a system to verify and register EPD@s as well as keeping a library of EPD@s and PCRs in accordance with ISO 14025. www.environdec.com

(FRLQYHQWEcoinvent Centre, www.ecoinvent.org

6LPD3UR SimaPro LCA Software, Pré Consultants, the Netherlands, www.pre-sustainability.com

0HWVLPV www.metsims.com

2QDW www.onpo.com



 onat