

Environmental Product Declaration

 **EPD**
INTERNATIONAL EPD SYSTEM

 **EPD**
TÜRKİYE
INTERNATIONAL EPD SYSTEM

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:



MDF (Medium Density Fibreboard)

EPD of multiple products, based on a representative product
from

Çamsan Entegre Ağaç Sanayi ve Ticaret A.Ş.



Programme:	The International EPD System, www.environdec.com
Programme operator:	EPD International AB
Licensee:	EPD Türkiye
Type of EPD:	EPD of multiple products from a company
EPD registration number:	EPD-IES-0026938:001
Version date:	2026-02-05
Validity date:	2031-02-04

An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com



GENERAL INFORMATION

Programme:	The International EPD® System	EPD Türkiye
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden	Nef 09 B Blok No:7/15 34415 Kağıthane / İstanbul
Website:	www.environdec.com	epdturkey.org
E-mail:	info@environdec.com	info@epdturkey.org

Accountabilities for PCR, LCA and independent, third-party verification

Product Category Rules (PCR):

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR): Construction products, 2019:14, version 2.0.1. Date: 2025-06-05, UN CPC code: 31441 Medium density fibreboard (MDF)

PCR review was conducted by: Rob Rouwette (chair), Noa Meron (co-chair). The review panel may be contacted via the Secretariat: www.environdec.com/support

c-PCR

c-PCR-006 (to PCR 2019:14) Wood and wood-based products for use in construction (EN 16485:2014) Version: 1.0.0 2019-12-20

Life Cycle Assessment (LCA)

LCA accountability: Ceren Naz Güleçyüz, Greenlife Consultancy
Kıymet Eda Sakınmaz, Greenlife Consultancy

Third-party Verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

Individual EPD verification without a pre-verified LCA/EPD tool

Third-party verifier: Callum Hill, JCH Industrial Ecology Ltd

Approved by: International EPD System

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

For further information about comparability, see ISO 14025.

INFORMATION ABOUT EPD OWNER

Owner of the EPD: Çamsan Entegre Ağaç Sanayi ve Ticaret A.Ş.

Address: Sakarya 2. Organized Industrial Zone Hendek/SAKARYA

Contact: vedat.sarikaya@camsan.com.tr

Description of the organisation: Çamsan Entegre was established in 1978 as Turkey's first manufacturer of laminate flooring, Medium Density Fibreboard (MDF), and MDFLAM.

Carrying the pride of being the company that first introduced this technology to our country, Çamsan Entegre Ağaç Sanayi ve Ticaret A.Ş. continues to maintain its leadership in the sector in terms of both quality and product range. Embracing the full responsibility of being the first and pioneering company in its industry, Çamsan Entegre Ağaç Sanayi ve Ticaret A.Ş. has become the leading brand that comes to mind when it comes to MDF and laminate flooring, thanks to its uncompromising commitment to quality.

Ranked among Turkey's top 500 companies for many years in terms of financial scale, our company has strengthened its position as the domestic market and industry leader while also expanding its exports and influence in international markets.

Currently exporting to more than 30 countries, our company continues to increase its market share abroad through the consistent quality of its products.

In addition to high-quality raw MDF boards available in various specifications and dimensions, Çamsan Entegre operates as an integrated facility with production units for MDFLAM (Melamine-Faced Boards) and laminate flooring. In 2020, we commissioned our PANEL production line and continue to produce panels under the brand name Çamsan PANELIA.

In 2016, we launched our new investment worth 85 million euros, including MDF, coating press, and laminate flooring production facilities. Our factory, equipped with high-capacity MDF production lines, is established on a total area of 300,000 m², of which 90,000 m² is covered.

PRODUCT INFORMATION

Product name: MDF (Medium Density Fibreboard)

Product identification: MDF



UN CPC code: 31441

Product description: MDF is an engineered wood-based panel product manufactured by thermo-mechanical defibration of wood or other lignocellulosic raw materials. The fibres are mixed with synthetic resins, dried to a specified moisture content, and pressed under heat and pressure to form homogeneous panels.

Due to the uniform distribution and high density of fibres throughout the board, MDF offers excellent machinability without edge breakage or internal voids. This property allows precise shaping and profiling, making MDF suitable for applications such as table tops, door panels, drawer fronts, and other components requiring smooth edges and high dimensional stability.

The product has a fine and smooth surface that provides an ideal base for coatings and decorative finishes such as paint, lacquer, laminate, PVC film, or wood veneer. Its consistent thickness, workability, and strength make MDF a reliable substitute for solid wood in various applications, including drawer sides, mirror frames, and mouldings.

Depending on its intended use, MDF can be classified as thin (1.8–3 mm), thick, moisture-resistant, fire-resistant, or furniture-grade. Based on density, it may also be categorized as soft, medium-hard, or hard fibreboard. Combining the advantages of hardboard and particleboard, MDF offers mechanical and physical properties comparable to solid wood.

With its high surface density, low roughness, and strong internal bonding, MDF provides excellent bending strength, elasticity modulus, and superior screw and nail holding capacity. These features make it a versatile and durable material for furniture manufacturing, interior applications, and decorative purposes.

Name and location of production site(s): Sakarya Second Organized Industrial Zone Hendek/SAKARYA

Technical Specifications:

Technical Data	Unit	Performance						Test Standard
		4 mm MDF	6 mm MDF	8 mm MDF	10 mm MDF	12 mm MDF	18-40 mm MDF	
Density	kg/m ³	820 ±3%	800 ±3%	800 ±3%	790 ±3%	770 ±3%	760 ±3%	EN 323
Thickness	mm	± 0.20	± 0.20	± 0.20	± 0.20	± 0.20	± 0.20	EN 324-1
Tensile Strength	N/mm ²	≥ 0.65	≥ 0.65	≥ 0.65	≥ 0.60	≥ 0.60	≥ 0.55	EN 319
Bending Strength	N/mm ²	≥ 23.00	≥ 23.00	≥ 23.00	≥ 22.00	≥ 22.00	≥ 20.00	EN 310
Modules of Elasticity	N/mm ²	≥ 2700	≥ 2700	≥ 2700	≥ 2500	≥ 2500	≥ 2200	EN 310
Moisture Content	%	4.0-1.0	4.0-1.0	4.0-1.0	4.0-1.0	4.0-1.0	4.0-1.0	EN 322
Thickness Swelling	%	≤ 35.00	≤ 30.00	≤ 17.00	≤ 15.00	≤ 15.00	≤ 12.00	EN 317
Formaldehyde Content (Perforator Method)	mg/100g	E1: ≤ 8 E2: 8 < x ≤ 30						EN 12460-5

CONTENT DECLARATION

- The mass (weight) of one unit of a product, as purchased or per declared unit: 642 kg
- Information on the environmental and hazardous/toxic properties of a substances contained in the product: Products meet the REACH requirement (reporting limit: 0.1% raw material), by default since no SVHC (substance of very high concern) exceeds 0.1%.

Product content	Mass, kg	Post-consumer recycled material, mass-% of product	Biogenic material, mass-% of product	Biogenic material, kg C/product or declared unit
Wood	580.31	0	100	286.67
Glue	60.03	0	0	0
Mould-release agent	0.06	0	0	0
Paraffin	1.6	0	0	0
TOTAL	642	0	90.4	286.67

Packaging materials	Mass, kg	Mass-% (versus the product)	Biogenic material, kg C/product or declared unit
Strip	0.0511	0.008	0
Cardboard	0.312	0.049	0.125
TOTAL	0.3631	0.057	0.125

1 kg biogenic carbon in the product/packaging is equivalent to the uptake of 44/12 kg of CO₂.

Biogenic carbon content is calculated according to EN 16449.

LCA INFORMATION

Declared unit	1 m ³ of MDF Board
Reference service life	NA
Time representativeness	Data is representative for 2024 production year. Primary production data for the year 2024 was used in the LCA.
Geographical Scope	Türkiye and Global
Database(s) and LCA software used	Ecoinvent 3.10 database and SimaPro software

Thickness (mm)	3	4	5	6	7	8-11	12-22	23-40
Conversion factor to mass(kg/m³)	820	800	780	770	720	700	690	680

Description of system boundaries: Cradle to gate (A1-A3) with modules A4-A5, modules C1-C4, and module D.

Raw Material Supply (A1): Çamsan's manufacturing activities begin with wood logs as the primary raw material. The company procures these logs from appropriate forest enterprises across various regions of Türkiye. This stage covers all operations carried out in the forest, including the harvesting, initial processing, and pre-treatment of the logs prior to their transportation to the production site.

Transportation (A2): Transportation stage covers the transportation of all raw materials and packaging materials to Çamsan's production facility. Transport is primarily conducted by road using trucks. The transport data for this module is modelled based on the weighted average transport distances of all raw materials and packaging materials procured in 2024.

Manufacturing (A3): At the manufacturing stage, the impact of fuel consumption and electricity usage throughout the production process, and water consumption are considered. Also, packaging and wastewater treatment were included in manufacturing.

During the manufacturing of MDF electricity is used as energy sources.

Details of electricity data used in LCA model

Country: Türkiye

Source Type: 100% Grid

Energy Sources: Coal: 62.7%

Oil: 0.7%

Natural gas: 36.6%

Electricity Data: Residual mix is calculated from "Electricity, medium voltage {TR}| market for electricity, medium voltage | Cut-off, S"

Electricity Emission Factor (GWP-GHG result): 0.573 kg CO₂eq/kWh

Transportation (A4): This stage covers the transportation of finished panels from Çamsan's production facility to the construction site or customer location. Transport is carried out primarily by road and sea, using trucks and containerships. The transport model is based on the weighted average transport distances of all product deliveries completed in 2024.

Construction (A5): The installation of MDF-based products is typically performed manually or with small hand-held tools. Consequently, the electricity and fuel consumption associated with installation activities is very low and considered negligible compared to the upstream production impacts (A1–A3). Therefore, no significant additional energy use is included in this module. Environmental impacts associated with packaging materials that leave the system during the construction stage are also accounted for within this module

De-Construction Demolition (C1): During the deconstruction or demolition stage, electricity consumption is required for the dismantling and removal of the material. An energy use of 0.323 MJ per kilogram of material is assumed for this module, based on Gervasio & Dimova (2018).

Transport (C2): A transport distance of 100 km is assumed for the movement of the product as waste after the end of its use phase.

Waste Processing (C3): No additional waste processing is required in this module, as the waste is directly sent to landfill or incineration facilities. Therefore, no further treatment prior to final disposal is considered.

Disposal (C4): In the end-of-life scenario, 75% of the MDF waste is disposed of in landfill, while the remaining 25% is sent to incineration.

Resource Recovery Stage (D): For the assessment of benefits and burdens beyond the system boundary, a calorific value of 18.6 MJ per kilogram of MDF was assumed to estimate the amount of electricity that could be avoided through heat recovery (Günther et al., 2012). In this stage, the electricity generation efficiency of the incineration plant is assumed to be 20 % (Intergovernmental Panel on Climate Change [IPCC], 2019). Thus, the heat generated from MDF incineration is considered to be converted into electricity, which in turn substitutes an equivalent amount of electricity that would otherwise be drawn from the grid.

Cut-off Rule: All the related data have been collected through detailed data sheets from the manufacturer. Data that is sent by the manufacturer has been analysed and modelled. All data related to inputs and outputs for processes has been included. In situations where there were data gaps, generic data (Ecoinvent 3.10) has been used. The cut-off criteria have been set to allow the omission of individual input flows that account for less than 1% of the total, provided that the cumulative contribution does not exceed 5%.

The data that is omitted from the LCA modelling is as follows.

- Employees' commuting to the workplace
- Infrastructure and machinery (Machinery refers to capital goods)
- Impacts due to the maintenance of the machinery
- Waste produced during the production.
- Ancillary material use (There is not an ancillary material use)

Allocations: In the production site of Çamsan, MDF is produced in its own production line. Therefore, energy consumption, water use generated waste and packaging data have been obtained specific to the product from the EPD owner. Hence, the data was gathered for each product line separately and no allocation is required.


Characterization Factor EN 15804 method based on EF 3.1 normalization and weight values, published in July 2022.

Process flow diagram: In the facility, wood raw materials sourced from forest enterprises, local suppliers, and imports are used. The wood is chipped in the chipping unit and stored in three separate silos. The stored chips are then screened, and non-standard chips are separated, while suitable ones are sent to the defibration unit. In the defibration unit, the chips are transformed into fibers under high pressure with the aid of knives.

After the defibration process, paraffin, resin, and hardener are added to the fibers before drying, and the mixture is sent to the dryer line. Cyclone-type dust collectors are installed to capture the dust generated in the chimneys of this section. The dried fibers are then transferred to the forming machine, where they are evenly distributed according to the required board thickness and production speed.

The formed fiber mat undergoes a pre-pressing process to achieve initial shaping before being sent to the hot press. In the press, the moving mat is processed under specific temperature, pressure, and speed conditions, resulting in a continuous MDF board at the press outlet. The press line is equipped with a gas emission system to capture process gases.

The raw boards exiting the press are cut to the desired dimensions, cooled in a star cooler, and then transferred to the semi-finished goods warehouse. A dust extraction system is located at the upper section of the star cooler unit. Depending on customer requirements, the MDF boards produced on the line may undergo sanding prior to shipment.

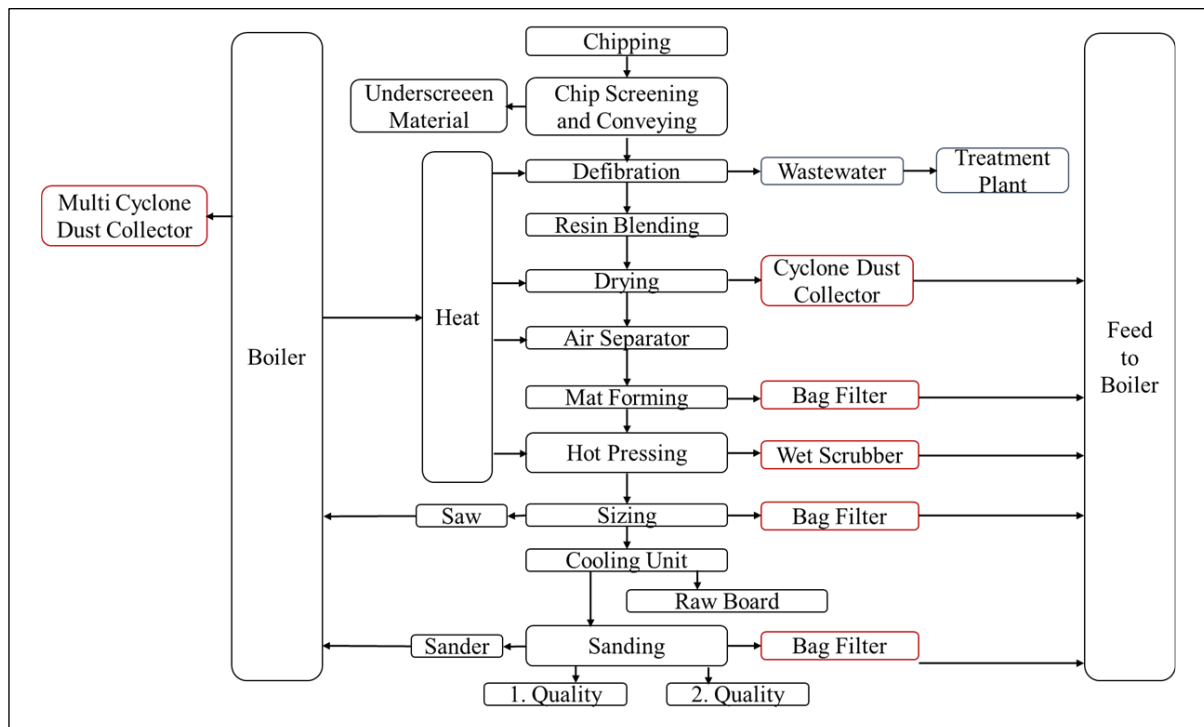

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Manufacturing of product	Collected data	EPD owner	2024	Primary data	0.3%
Generation of electricity used in manufacturing of product	Database	Ecoinvent v3.10	2024	Primary data	33%
Transport of raw material to manufacturing site	Database	Ecoinvent v3.10	2024	Primary data	8.8%
Production of packaging	Database	Ecoinvent v3.10	2024	Secondary data	0%
Other processes	Database	Ecoinvent v3.10	2024	Secondary data	0%
Total share of primary data, of GWP-GHG results for A1-A3					42.1%

Modules declared, geographical scope, share of primary data (in GWP-GHG results) and data variation (in GWP-GHG results):

X: Declared Module, MND: Module Not Declared

	Product stage			Distribution/ installation stage		Use stage							End-of-life stage				Beyond product life cycle
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X
Geography	GLO	GLO	TR	GLO	GLO	-	-	-	-	-	-	-	GLO	GLO	GLO	GLO	GLO
Share of primary data	42.1%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

ENVIRONMENTAL PERFORMANCE

Impact category indicators

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	-5.74E+02	3.03E+01	3.22E+01	5.21E+01	1.23E+01	0.00E+00	1.11E+03	-4.56E+02
GWP-fossil	kg CO ₂ eq.	4.73E+02	3.03E+01	3.18E+01	5.21E+01	1.23E+01	0.00E+00	6.19E+01	-4.50E+02
GWP-biogenic	kg CO ₂ eq.	-1.05E+03	0.00E+00	4.17E-02	0.00E+00	0.00E+00	0.00E+00	1.05E+03	-5.92E+00
GWP-luluc	kg CO ₂ eq.	2.75E+00	1.48E-02	3.46E-01	3.39E-03	5.00E-03	0.00E+00	1.03E-02	-2.92E-02
ODP	kg CFC 11 eq.	1.57E-05	4.52E-07	1.81E-07	2.76E-07	1.82E-07	0,00E+00	0.00E+00	-2.38E-06
AP	mol H ⁺ eq.	2.21E+00	6.25E-01	2.09E-01	3.41E-01	2.82E-02	0,00E+00	0.00E+00	-2.94E+00
EP-freshwater	kg P eq.	2.25E-01	1.45E-03	3.26E-02	5.32E-02	9.73E-04	0.00E+00	8.23E-03	-4.59E-01
EP-marine	kg N eq.	4.46E-01	1.56E-01	3.66E-02	6.04E-02	6.55E-03	0.00E+00	7.40E-02	-5.22E-01
EP-terrestrial	mol N eq.	4.89E+00	1.73E+00	3.34E-01	5.51E-01	7.07E-02	0.00E+00	1.83E-01	-4.76E+00
POCP	kg NMVOC eq.	2.20E+00	4.87E-01	9.87E-02	1.63E-01	3.95E-02	0.00E+00	0.00E+00	-1.41E+00
ADP-minerals&metals*	kg Sb eq.	3.45E-03	4.77E-05	3.32E-05	1.20E-05	4.02E-05	0.00E+00	1.01E-05	-1.03E-04
ADP-fossil*	MJ	9.26E+03	3.99E+02	3.48E+02	5.82E+02	1.73E+02	0.00E+00	5.01E+01	-5.03E+03
WDP*	m ³	3.84E+02	1.34E+00	1.64E+01	3.38E+00	7.88E-01	0.00E+00	-1.72E+00	-2.92E+01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Additional mandatory and voluntary impact category indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	4.76E+02	3.03E+01	3.21E+01	5.21E+01	1.23E+01	0.00E+00	6.19E+01	-4.50E+02

Resource use indicators

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	1.78E+04	3.66E+00	1.44E+02	1.06E+01	2.21E+00	0.00E+00	7.54E+03	-9.17E+01
PERM	MJ	1.01E+04	0.00E+00	-5.30E+00	0.00E+00	0.00E+00	0.00E+00	-1.01E+04	0.00E+00
PERT	MJ	2.79E+04	3.66E+00	1.39E+02	1.06E+01	2.21E+00	0.00E+00	-2.56E+03	-9.17E+01
PENRE	MJ	9.26E+03	3.99E+02	3.48E+02	5.82E+02	1.73E+02	0.00E+00	5.01E+01	-5.03E+03
PENRM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	9.26E+03	3.99E+02	3.48E+02	5.82E+02	1.73E+02	0.00E+00	5.01E+01	-5.03E+03
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m ³	3.73E+02	1.35E+00	1.66E+01	3.34E+00	7.92E-01	0.00E+00	-1.75E+00	-2.89E+01
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water								

¹This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

Waste indicators

PARAMETER	UNIT	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	4.09E-02	2.29E-03	5.56E-04	1.01E-03	1.19E-03	0.00E+00	4.38E-04	-8.74E-03
Non-hazardous waste disposed	kg	8.60E+01	1.31E+01	1.04E+00	1.04E+00	8.29E+00	0.00E+00	4.21E+01	-8.99E+00
Radioactive waste disposed	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Output flow indicators (optional)

PARAMETER	UNIT	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.82E+02	0.00E+00
Exported energy, electricity	MJ per energy carrier	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.79E+03	0.00E+00
Exported energy, thermal	MJ per energy carrier	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Additional mandatory and voluntary impact category indicators (100% Landfill End-of-Life Scenario)

Results per functional or declared unit								
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4
GWP-total	kg CO ₂ eq.	-5.74E+02	3.03E+01	3.22E+01	5.21E+01	1.23E+01	0.00E+00	3.74E+00
GWP-fossil	kg CO ₂ eq.	4.73E+02	3.03E+01	3.18E+01	5.21E+01	1.23E+01	0.00E+00	3.73E+00
GWP-biogenic	kg CO ₂ eq.	-1.05E+03	0.00E+00	4.17E-02	0.00E+00	0.00E+00	0.00E+00	1.05E+03
GWP-luluc	kg CO ₂ eq.	2.75E+00	1.48E-02	3.46E-01	3.39E-03	5.00E-03	0.00E+00	1.58E-03
ODP	kg CFC 11 eq.	1.57E-05	4.52E-07	1.81E-07	2.76E-07	1.82E-07	0.00E+00	4.89E-08
AP	mol H ⁺ eq.	2.21E+00	6.25E-01	2.09E-01	3.41E-01	2.82E-02	0.00E+00	3.06E-02
EP-freshwater	kg P eq.	2.25E-01	1.45E-03	3.26E-02	5.32E-02	9.73E-04	0.00E+00	4.22E-04
EP-marine	kg N eq.	4.46E-01	1.56E-01	3.66E-02	6.04E-02	6.55E-03	0.00E+00	1.32E-02
EP-terrestrial	mol N eq.	4.89E+00	1.73E+00	3.34E-01	5.51E-01	7.07E-02	0.00E+00	1.44E-01
POCP	kg NMVOC eq.	2.20E+00	4.87E-01	9.87E-02	1.63E-01	3.95E-02	0.00E+00	4.35E-02
ADP-minerals&metals*	kg Sb eq.	3.45E-03	4.77E-05	3.32E-05	1.20E-05	4.02E-05	0.00E+00	1.72E-06
ADP-fossil*	MJ	9,26E+03	3,99E+02	3,48E+02	5,82E+02	1,73E+02	0.00E+00	4.83E+01
WDP*	m ³	3,84E+02	1,34E+00	1,64E+01	3,38E+00	7,88E-01	0.00E+00	1.69E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption							

Additional mandatory and voluntary impact category indicators (100% Incineration End-of-Life Scenario)

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	-5.74E+02	3.03E+01	3.22E+01	5.21E+01	1.23E+01	0.00E+00	1.05E+03	-4.02E+02
GWP-fossil	kg CO ₂ eq.	4.73E+02	3.03E+01	3.18E+01	5.21E+01	1.23E+01	0.00E+00	2.40E+00	-3.95E+02
GWP-biogenic	kg CO ₂ eq.	-1.05E+03	0.00E+00	4.17E-02	0.00E+00	0.00E+00	0.00E+00	1.05E+03	-6.77E+00
GWP-luluc	kg CO ₂ eq.	2.75E+00	1.48E-02	3.46E-01	3.39E-03	5.00E-03	0.00E+00	4.51E-04	-2.70E+00
ODP	kg CFC 11 eq.	1.57E-05	4.52E-07	1.81E-07	2.76E-07	1.82E-07	0.00E+00	3.02E-08	-3.26E-06
AP	mol H ⁺ eq.	2.21E+00	6.25E-01	2.09E-01	3.41E-01	2.82E-02	0.00E+00	1.71E-01	-2.36E+00
EP-freshwater	kg P eq.	2.25E-01	1.45E-03	3.26E-02	5.32E-02	9.73E-04	0.00E+00	3.74E-04	-3.89E-01
EP-marine	kg N eq.	4.46E-01	1.56E-01	3.66E-02	6.04E-02	6.55E-03	0.00E+00	8.14E-02	-4.11E-01
EP-terrestrial	mol N eq.	4.89E+00	1.73E+00	3.34E-01	5.51E-01	7.07E-02	0.00E+00	9.48E-01	-3.69E+00
POCP	kg NMVOC eq.	2.20E+00	4.87E-01	9.87E-02	1.63E-01	3.95E-02	0.00E+00	2.51E-01	-1.16E+00
ADP-minerals&metals*	kg Sb eq.	3.45E-03	4.77E-05	3.32E-05	1.20E-05	4.02E-05	0.00E+00	4.54E-06	-4.38E-04
ADP-fossil*	MJ	9,26E+03	3,99E+02	3,48E+02	5,82E+02	1,73E+02	0.00E+00	3.22E+01	-4.54E+03
WDP*	m ³	3,84E+02	1,34E+00	1,64E+01	3,38E+00	7,88E-01	0.00E+00	7.39E+00	-1.35E+02
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

ABBREVIATIONS

Abbreviation	Definition
ADP	Abiotic Depletion Potential
AP	Acidification Potential
Çamsan	Çamsan Entegre Ağaç Sanayi ve Ticaret A.Ş.
EN	European Norm (Standard)
EF	Environmental Footprint
EP	Eutrophication Potential
Eq	Equivalent
GPI	General Programme Instructions
GHG	Greenhouse Gases
GWP	Global Warming Potential
ISO	International Organization for Standardization
CEN	European Committee for Standardization
CPC	Central product classification
GRI	Global Reporting Initiative
LCA	Life Cycle Assessment
MDF	Medium Density Fibreboard
ND	Not Declared
ODP	Ozone Layer Depletion
PCR	Product Category Rules
POCP	Photochemical Oxidant Creation Potential
SVHC	Substances of Very High Concern
WDP	Water Deprivation Potential

REFERENCES

- 2019:14-c-PCR-006 Wood and wood-based products for use in construction (version 1.0.0)
- Ecoinvent / Ecoinvent Centre, www.ecoinvent.org
- Ellrich, E. R., Via, B., Roueche, D., & Sener, K. (2025). A comparative floor assembly design and life-cycle assessment study of steel–timber and steel–concrete composite structural systems. *Forest Products Journal*, 75(1), 82–94. <https://doi.org/10.13073/FPJ-D-24-00041>
- EN 15804:2012+A2:2019 / AC: 2021 Sustainability of Construction Works – Environmental Product Declarations – Core Rules for the Product Category of Construction Products
- EN 16449:2014. Wood and wood-based products – Calculation of the biogenic carbon content of wood and conversion to carbon dioxide.
- EN 16485:2014. Round and sawn timber — Environmental product declarations: Product category rules for wood and wood-based products for use in construction.
- EN ISO 14001 / Environmental Management Systems – Requirements
- GPI / General Programme Instructions of the International EPD® System. Version 5.0.1
- Günther, B., Gebauer, K., Barkowski, R., Rosenthal, M., & Bues, C.-T. (2012). Calorific value of selected wood species and wood products. *European Journal of Wood and Wood Products*, 70(5), 755-757. <https://doi.org/10.1007/s00107-012-0613-z>
- Intergovernmental Panel on Climate Change. (2019). *Good Practice Guidance and Uncertainty Management in National Greenhouse Gas Inventories – Waste Incineration*. IGES.
- ISO 14020:2000 / Environmental Labels and Declarations – General Principles
- ISO 14025 / DIN EN ISO 14025:2009-11: Environmental Labels and Declarations – Type III Environmental Declarations – Principles and Procedures
- ISO 14040/44 / DIN EN ISO 14040: 2006-10, Environmental Management – Life Cycle Assessment – Principles and Framework (ISO14040:2006) and Requirements and Guidelines (ISO 14044:2006)
- PCR for Construction Products The International EPD System, 2019:14 Version 2.0.1
- SimaPro / SimaPro LCA Software, Pré Consultants, the Netherlands, www.pre-sustainability.com
- The International EPD® System / The International EPD® System is a programme for type III environmental declarations, maintaining a system to verify and register EPD@s as well as keeping a library of EPD@s and PCRs in accordance with ISO 14025. www.environdec.com

VERSION HISTORY

Original Version of the EPD, 2026-02-05

